



SCHLITZ-O-MAT Bag Openers

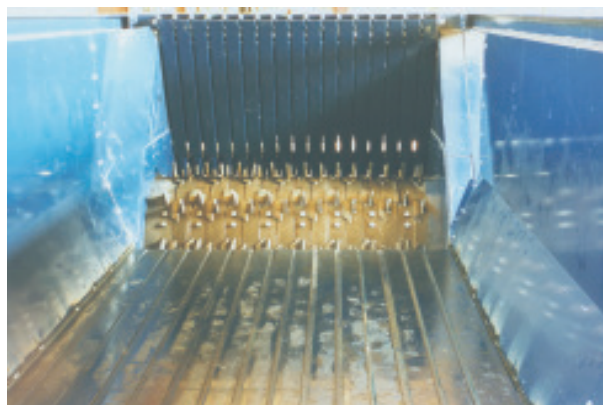

- Virtually 100% opening and emptying of the plastic bags
- High opening rate of "bags within bags"
- Suitable for a wide range of material, e.g. light weight packaging material, biowaste, residual waste
- Overload protection, integrated Function and Blockage System
- Infinitely adjustable throughput rate
- Loosened up and evened out material supply to the sorting process
- Low servicing and maintenance requirements
- Safe tangling protection against strings, wires and foils
- Large storage hopper for feeding by front-end loader

General Drawing

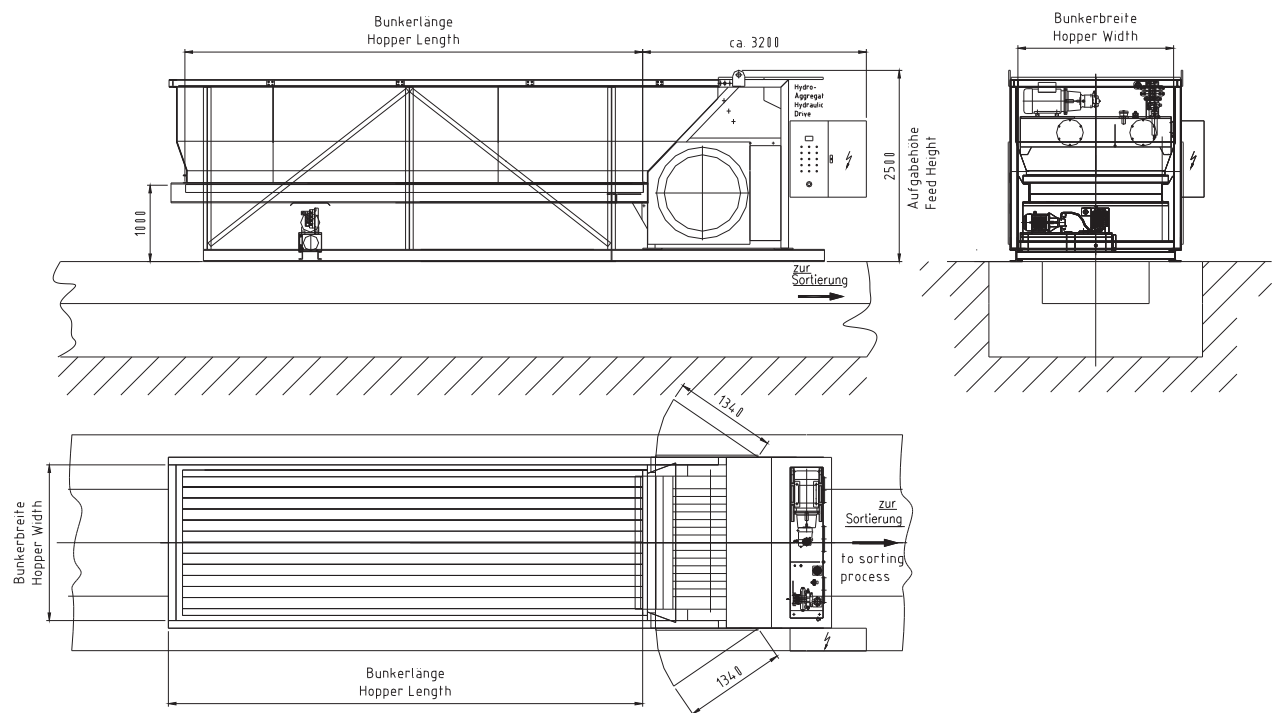

Short Description

The SCHLITZ-O-MAT Bag Opener opens the plastic sacks and transfers the metered material to the subsequent sorting- and preparations plants. The SCHLITZ-O-MAT is available as standard model and combined with a charging hopper. The hopper is fed batchwise by a front loader.

Standard Model for **light weight packaging material and waste paper** (up to approx. 150 kg/ m³)

	S	N	XL
SCHLITZ-O-MAT	1.000 mm	1.300 mm	1.700 mm
Working Width:	3 t/h at 50 kg/m ³	5 t/h at 50 kg/m ³	6,5 t/h at 50 kg/m ³
Throughput Rate:	6 t/h at 100 kg/m ³	10 t/h at 100 kg/m ³	13 t/h at 100 kg/m ³

Reinforced Model for **humid and residual waste**

	MSW 0	MSW 1-17	MSW 1-21
SCHLITZ-O-MAT	1.300 mm	1.700 mm	2.100 mm
Working Width:	5 t/h at 50 kg/m ³	6,5 t/h at 50 kg/m ³	8 t/h at 50 kg/m ³
Throughput Rate:	10 t/h at 100 kg/m ³	13 t/h at 100 kg/m ³	16 t/h at 100 kg/m ³
	16 t/h at 200 kg/m ³	23 t/h at 200 kg/m ³	29 t/h at 200 kg/m ³
	18 t/h at 300 kg/m ³	30 t/h at 300 kg/m ³	40 t/h at 300 kg/m ³