

BROCK[®]

SL 160



*The Economic Model
without Hydrostat*

SL 160


Hopper capacity: 4 m³
Watertank: 900 ltr.
Base, sides and center partition of the hopper in stainless steel. Thickness of hopper plates 4 mm

Auxiliary engine operating speed:
1.250-1.500 rpm

Sweeping width:

Duct 650 mm

- + Conical brush right 1.200 mm
- + Conical brush right and left 1.600 mm
- + Cylindrical brushes 2.650 mm

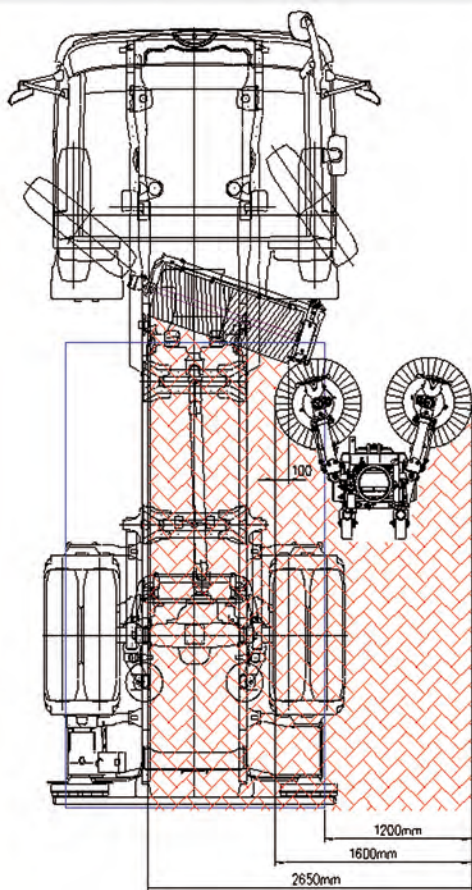

Weight of the superstructure approximate: 4200 kg
Our sweepers can be equipped with diverse useful extras on request

*Photos particulate with extra features.
Subject to technical changes without
prior notice*

*Brock Kehrtechnik GmbH
Salinger Feld 10 a
58454 Witten
Germany*

*Tel: +49 (0) 2302 58 969-0
Fax: +49 (0) 2302 58 969-150
E-Mail: info@brock-kehrtechnik.de
Internet: <http://www.brock-kehrtechnik.de>*